




# PRODUCT DATA SHEET

## DUCMW124FRE

### FIRE RATED EXTRACT VALVE



**W** RAL9010

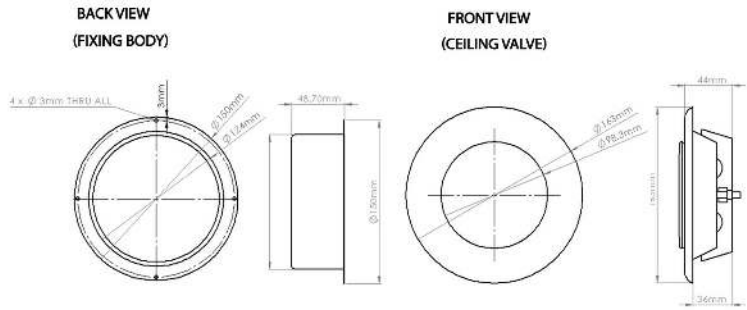

### SPECIFICATION DETAILS

The DUCMW124FRE 125mm diameter Round Fire Rated Extract Valve is manufactured from White Epoxy Powder Coated Steel. The valve has a male spigot to fit inside the System 125 duct.

The DUCMW124FRE Extract Air Valve is fully adjustable and has a locking nut to fix the position of the control disc upon commissioning. It is supplied complete with a fixing body with pre-drilled holes for installation.


The DUCMW124FRE incorporates an integral intumescent material and has been fire tested to BS EN 1365-2: 1999 with 60 minute rating for ceilings.

DUCMW124FRE has been designed for use with Kair System 125 Round.

<b>Manufacturer:</b>	Kair Ventilation
<b>Part Number:</b>	DUCMW124FRE
<b>Size:</b>	125mm Diameter
<b>For use with:</b>	Kair System 125
<b>Box quantity:</b>	7
<b>Individual Weight:</b>	390g
<b>Colour:</b>	White

<b>FIRE RATING</b>	60 Minutes
--------------------	------------

### PERFORMANCE CURVE

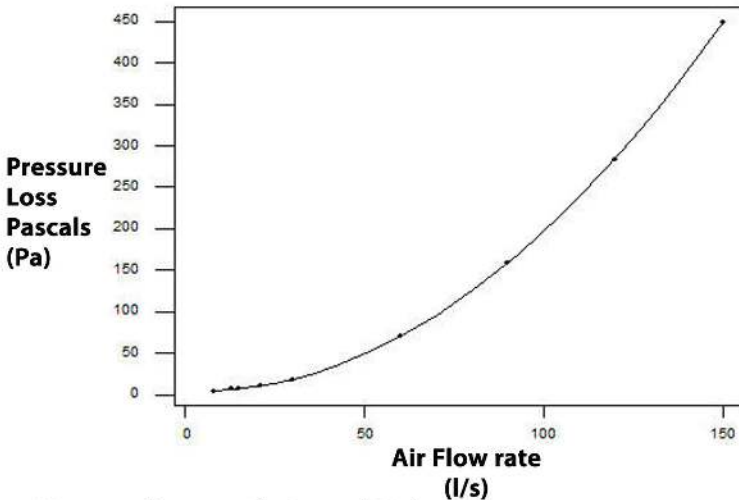

\*Pressure losses with Control Disk 10mm open

### Associated Ancillaries

<p>125mm 1m Round Pipe</p> <p>DUCVK267</p>	<p>125mm Round Pipe Connector</p> <p>DUCVK355</p>	<p>125mm Round Ceiling Vent Diffuser</p> <p>DUCVK356F</p>	<p>125mm Pipe to Pipe Self-Seal Coupling</p> <p>DUCVK125PP</p>	<p>125mm Pipe to Fitting Self-Seal Coupling</p> <p>DUCVK125PF</p>
--	---	---	--	---