



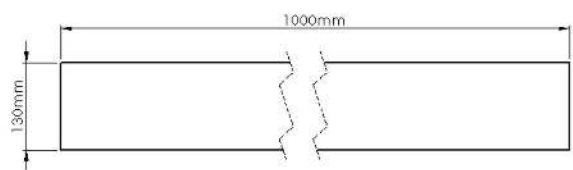

PRODUCT DATA SHEET
DUCSST-220-1M
 1M SELF-SEAL THERMAL DUCT



SPECIFICATION DETAILS

The Kair Self-Seal Thermal DUCSST-220-1M 1m length of insulated duct is manufactured from graphite impregnated expanded polystyrene (EPS) with a minimum density of 25kg/m³ and provides a free area of 19,752 mm². The DUCSST-220-1M is supplied with a single Duct to Duct Connector to fit into the next straight length of duct. The open end of the duct allows a push-fit over a 220mm x 90mm Fan Spigot or it can be cut to length to insert a Duct to Fitting Connector to push, click and lock into the female coupling housed in every Fitting. The Duct to Duct and Duct to Fitting Connectors are manufactured from prime quality High Impact Polystyrene.

The EPS material is fully tested to meet the thermal conductivity requirements of BASF-EN13163 to assist with the prevention of condensation and is flame retardant to DIN 4102-B1.

Kair Self-Seal Thermal Ducting exceeds the current UK Domestic Ventilation Regulation requirements of Part F 2010 Domestic Ventilation Compliance Guide and NHBC Guidance Document Chapter 3.2 and provides a thermal conductivity of 0.03 W/mK which at 20mm thickness gives a thermal resistance or R-value of 0.666 m²K/W.

The patent pending push, click and lock mechanism provides a low leakage solution which exceeds the requirements set out in DW/143 Class A leakage test and DW/154 ductwork standards.


The Self-Seal Thermal is compliant with the requirements outlined in the Energy performance characteristics database for use in SAP with MVHR and MEV supply and extract ventilation systems.

Manufacturer:	Kair Ventilation
Part Number:	DUCSST-220-1M
Size:	220mm x 90mm x 1m
For use with:	Kair System 220
Box quantity:	6
Individual Weight:	502g
Colour:	Grey
Thermal Resistance:	0.666 m ² K/W
Thermal Conductivity:	0.03 W/mK

MAX/MIN OPERATING TEMPERATURES

+ 60°C to - 15°C

PERFORMANCE CURVE

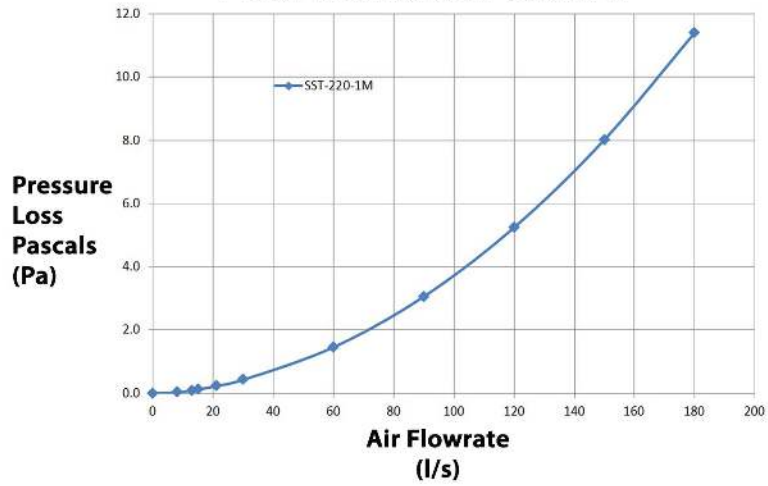

AIRFLOW	RESISTANCE
8 l/s	0.00 pa
13 l/s	0.10 pa
21 l/s	0.20 pa
30 l/s	0.40 pa
60 l/s	1.50 pa
120 l/s	5.20 pa

220x90mm Thermal Vertical 45° Bend

DUCSST-220-45VB

220x90mm Thermal Horizontal 90° Bend

DUCSST-220-90HB

220x90mm Thermal 125mm Elbow Bend

DUCSST-220-PL

220x90mm Thermal Equal T Piece

DUCSST-220-TP

220x90mm Thermal Horizontal 45° Bend

DUCSST-220-45HB