





PRODUCT DATA SHEET

DUCVKC289

COWLED OUTLET C/W NON-RETURN FLAP ROUND SPIGOT



- W** RAL9003
- B** RAL8017
- BE** RAL1001
- T** RAL2001
- BL** RAL9011

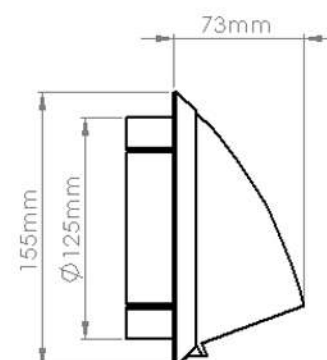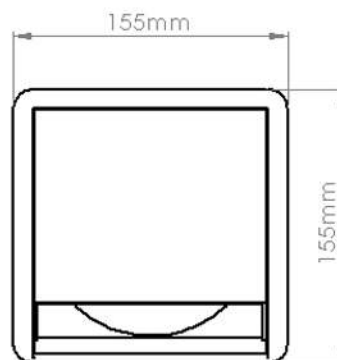

SPECIFICATION DETAILS

The DUCVKC289 125mm diameter Cowled Outlet with Non-Return Flap Round Spigot is manufactured from High Impact Polypropylene and has a minimum free area of 11,651mm². It has a male spigot for connection inside of the System 125 duct.

The DUCVKC289 is designed for installation on exposed external walls where wind or back pressure against the ventilation unit are present. The cowled outlet is designed to shield the duct from the wind and deflect the air away. The non-return flap acts as an additional measure to prevent airflow returning through the duct. As the fan operates the flap lifts to allow the exhaust air to disperse into the atmosphere. DUCVKC289 is designed for exhaust air only.


DUCVKC289 is manufactured in compliance with Domestic Plastic Ductwork Specification DW/154 and does meet UL94HB flammability standard.

DUCVKC289 has been designed for use with Kair System 125 Round.

Manufacturer:	Kair Ventilation
Part Number:	DUCVKC289
Size:	125mm Diameter
For use with:	Kair System 125
Box quantity:	15
Individual Weight:	145g
Colour:	White, Brown, Beige & Terracotta

MAX/MIN OPERATING TEMPERATURES	+ 60°C to - 15°C
---------------------------------------	------------------

PERFORMANCE CURVE

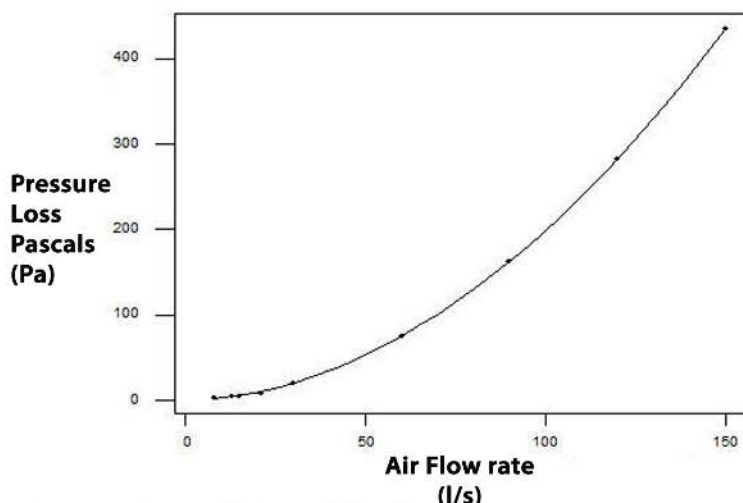

AIRFLOW	RESISTANCE
8 l/s	3.60 pa
13 l/s	5.00 pa
21 l/s	8.00 pa
30 l/s	19.83 pa
60 l/s	74.99 pa
120 l/s	283.64 pa

Associated Ancillaries

