



**PRODUCT DATA SHEET**




**DUCVKC5733G**

**DOUBLE AIRBRICK ADAPTOR C/W GRILLES**



**AVAILABLE COLOURS**

- W** RAL9003
- B** RAL8017
- BE** RAL1001
- T** RAL2001
- BL** RAL9011

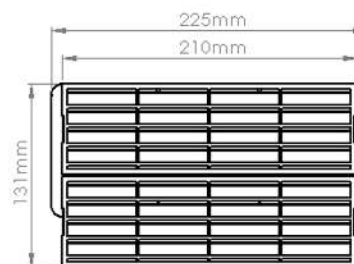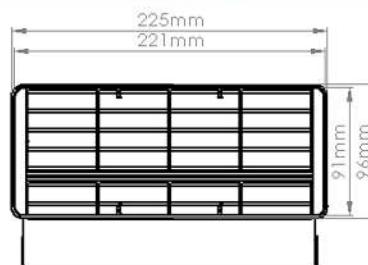

**SPECIFICATION DETAILS**

The DUCVKC5733G 220x90mm Rectangular Double Airbrick Adaptor with Grilles is manufactured from (white) High Impact Polystyrene and has a minimum free area of 15,360mm<sup>2</sup>. It has a female adaptor for connection outside of the System 220 duct.

The DUCVKC5733G is fully compliant with SAP Appendix Q Product Characteristics Database recommendations for duct sizes used with both extract and Mechanical Heat Recovery Systems.


DUCVKC5733G is manufactured in compliance with Domestic Plastic Ductwork Specification DW/154 and does meet UL94HB flammability standard.

DUCVKC5733G has been designed for use with Kair System 220.

<b>Manufacturer:</b>	Kair Ventilation
<b>Part Number:</b>	DUCVKC5733G
<b>Size:</b>	220mm x 90mm
<b>For use with:</b>	Kair System 220
<b>Box quantity:</b>	5
<b>Individual Weight:</b>	332g
<b>Colour:</b>	White

<b>MAX/MIN OPERATING TEMPERATURES</b>	+ 60°C to - 15°C
---------------------------------------	------------------

**PERFORMANCE CURVE**

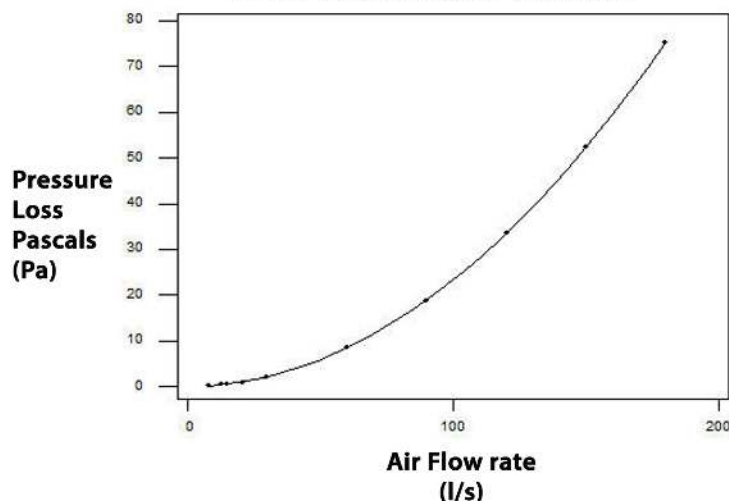

AIRFLOW	RESISTANCE
8 l/s	0.31 pa
13 l/s	0.60 pa
21 l/s	1.08 pa
30 l/s	2.20 pa
60 l/s	8.50 pa
120 l/s	33.70 pa

**Associated Ancillaries**

