

NEW  
H MODEL

# Quiet Fan Conceal Range Domestic Range

CQF100



The Manrose Quiet Fan Conceal offers a low sound level of only 27dBA, has a tile like front cover, and is now available as a humidistat model.

Designed for wall and panel mounting, this comprehensive range is ideal for bathrooms and toilets.

The unit also comes complete with a performance enhancing turning vane system located in the spigot to improve performance by maintaining a high output.

- High quality, long life motors continuously rated and warranted for a minimum of 30,000 hours or 3 years
- Manufactured using high gloss thermoplastics for strength and durability
- Decibel Level of ONLY 27dB(A) at 3m. Over 60% reduction in comparison to standard 4" (100mm) domestic fans.
- An impressive extraction rate of 75m<sup>3</sup>/hr, 21 litres per second
- Low energy motor with a maximum consumption of 7 Watts
- Complete with integral backdraught shutters
- New Humidity controlled version with fixed over run

AVAILABLE NOW FROM

**i-sells.co.uk**



Showroom:  
15 St John's Parade  
Sidcup High Street  
DA14 6ES

EMAIL: [sales@i-sells.co.uk](mailto:sales@i-sells.co.uk)  
SALES: 020 8463 9696  
WEB: [www.i-sells.co.uk](http://www.i-sells.co.uk)




## Technical Details

### Cat. No. Product type

<b>CQF100S</b>	Standard model for remote switching
<b>CQF100T</b>	Timer model incorporating integral adjustable electronic timer (1-20mins)
<b>CQF100HT</b>	<b>NEW</b> Humidity model with fully adjustable humidity sensor & integral fixed electronic timer


### Dimensions (mm)

A	B	C	D	EØ
159	121	41	80	99

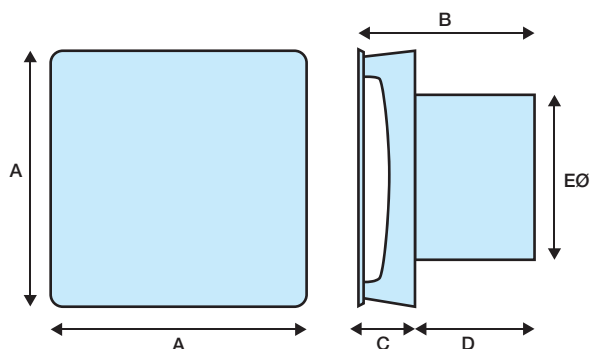

### Performance Graph

CQF100 75m<sup>3</sup>/hr, 21 litres per second

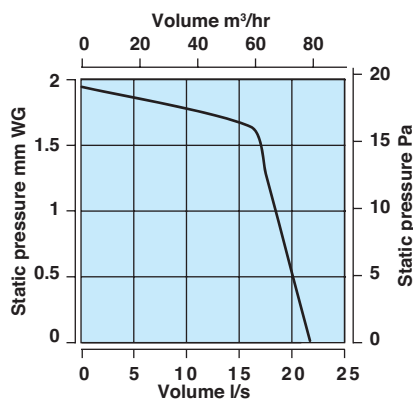

### Electrical

220-240V - AC. 50Hz Single Phase consuming 7 watts. These fans are double insulated and do not require an earth. All wiring must comply with current IEE regulations. A double pole isolating switch, having a contact separation of at least 3mm in all poles, must be used with a 3 amp fuse fitted. The fan must not be accessible to a person using either the shower or bath and mounted a minimum of 1.8 metres from the floor.

### Additional Data

Maximum Pressure: 20 p.a.

Fan Speed: 2300 r.p.m.

Sound Volume: 27 dB(A)

Maximum Operating Temperature: 40°C

AVAILABLE NOW FROM

**i-sells.co.uk**



Showroom:  
15 St John's Parade  
Sidcup High Street  
DA14 6ES

EMAIL: [sales@i-sells.co.uk](mailto:sales@i-sells.co.uk)  
SALES: 020 8463 9696  
WEB: [www.i-sells.co.uk](http://www.i-sells.co.uk)

**MANROSE**