



## Elix

### GENERAL FEATURES

- exhausts directly to the outside or through long lengths of ducting (up to 15m)
- runs continuously at pre-selected choice of two speeds (fixed at installation)
- Speed 1 operates at 8 l/s (factory set)
- Speed 2 operates at 14 l/s
- anti-vibration gasket
- easily removable, washable polypropylene filter
- speed boosted to maximum [28 l/s] using integral pull cord or by:
  - remote switch/light switch
  - PIR sensor
  - DRH240 (dynamic remote humidistat)
- energy saving ventilation
- **extremely low running costs**
- low carbon footprint
- 5 year warranty

### TECHNICAL FEATURES



- shockproof, high quality technopolymer casing
- designed using latest wind tunnel technology and CFD simulations
- profile increases the fluid dynamics
- EC induction motor with thermal protection
- 43,000 hour life motors with maintenance free and long life ball bearings
- operates in ambient temperatures up to 40°C
- double insulated - no earth required
- **IPX4 - Splashproof** rated - can safely be installed in Zones I and II

### COMPLIES WITH

- Part L1 2010 of Building Regulations for enhanced energy saving capability
- Part F 2010 of Building Regulations for reliable, efficient ventilation
- IEC 60335-2-80, BT 2006/95/CE and EMC 2004/108/CE European Directive against radio interference and electro-magnetic compatibility
- CE marked
- **SAP Q eligible**
- **Energy Saving Trust Best Practice Compliant**

### OTHER MODELS AVAILABLE:

- **ELX1003DT** - 3 speed, continuous running with comfort timer (timer does not activate unless fan has been running for 2 minutes to avoid unnecessary night-time operation) and pull-cord
- **ELX1003HDT** - with comfort timer, humidistat and pull-cord
- **ELX1003LV** - 3 speed, continuous running with pull-cord - LOW VOLT (SELV)
- **ELX1003DTLV** - 3 speed, continuous running, with comfort timer, overrun timer and pull-cord LOW VOLT (SELV)
- **ELX1003HDTLV** - 3 speed, continuous running, with comfort timer, humidistat and pull-cord - LOW VOLT (SELV)

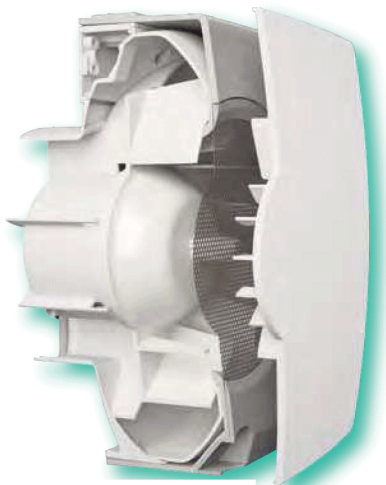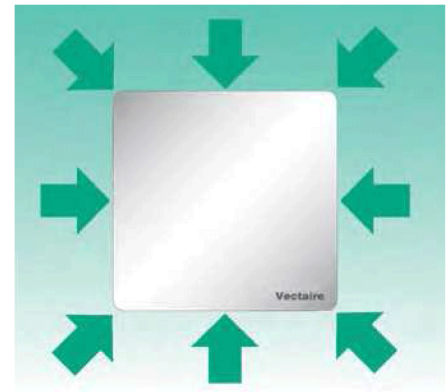

Vectaire Ltd can supply all accessories for use with these units, including fire dampers, air valves, ducting, outside grilles and wall cowls. Additionally, Vectaire offers a design service to ensure that the unit installed is the best possible to provide efficient, effective, low energy and low running cost ventilation. Vectaire can also organise installation, commissioning and maintenance of these products

AVAILABLE NOW FROM  
**i-sells.co.uk**



Showroom:  
 15 St John's Parade  
 Sidcup High Street  
 DA14 6ES

EMAIL: sales@i-sells.co.uk  
 SALES: 020 8463 9696  
 WEB: www.i-sells.co.uk

TECHNICAL CHARACTERISTICS									
Model	Airflow l/sec			Power - Watts			dBA (@ 3m in free field)		
	Speed 1	Speed 2	max	Speed 1	Speed 2	max	Speed 1	Speed 2	max
ELX1003	8	14	28	1.3	2.9	15	15.5	17.5	35

All Results with Rigid Duct	RESULTS for SAP CALCULATIONS		RESULTS for Approved Document F		
	Specific Fan Power (W/l/s)	EST Best Practice Performance Compliant	Flow Rate (l/sec)	Flow Rate - wind condition (l/sec)	% reduction of Total Flow Rate
In room - kitchen	0.22	Yes	13.0	12.9	1
In room - wetroom	0.16	Yes	8.0	7.8	3
Through wall - kitchen	0.17	Yes	13.0	12.9	1
Through wall - wetroom	0.14	Yes	8.3	8.1	2

Figures from BRE test results at minimum flow rate conditions

### TYPICAL SPECIFICATION

Supply and Install an ELX1003 high performance, energy efficient centrifugal fan which has been tested and is SAP Q Eligible and suitable for **ALL** domestic wet rooms as supplied by Vectaire Ltd, Lincoln Road, Cressex Business Park, High Wycombe, Bucks, HP12 3RH.

The fan is to be suitable for installation either into a wall or ceiling (with the appropriate accessories) and to have an air intake around the whole perimeter and have a footprint of no more than 180mm square. The fan is to be continuous running at its low speed (with a choice of two lower speeds) and be capable of being boosted to maximum speed by means of an integral pull cord or (with the cord removed) a remote switch, PIR sensor or humidistat.

The fan should have specific fan power (as tested by BRE) of no higher than 0.22w/l/s in a kitchen and 0.16w/l/s in a bathroom. The fan must not exceed 2.0w power consumption on the lowest speed.

The fan casing should be made of shock-proof, high quality technopolymer, and should have an EC induction motor with maintenance-free, long life ball bearings, and up to a 43,000 hour life. It should be protected with a thermal cut-out. The fan should be double insulated and be IPX4 splashproof protected suitable for installation into Zones I and II.

The fan is to comply with IEC 60335-2-80, LVD2006/95/CE and EMC 2004/108/CE European Directive against radio interference and electro-magnetic compatibility, and be CE marked.

The fan should have 5 year manufacturer's warranty and be supplied with a user guide as required.

Only approved accessories should be used:

Wall Plates - as required


Wall terminations - all wall terminations must use the approved wall cowl or high rise kit.

AVAILABLE NOW FROM  
**i-sells.co.uk**



# Elix

## PERFORMANCE (curves are for guidance only)

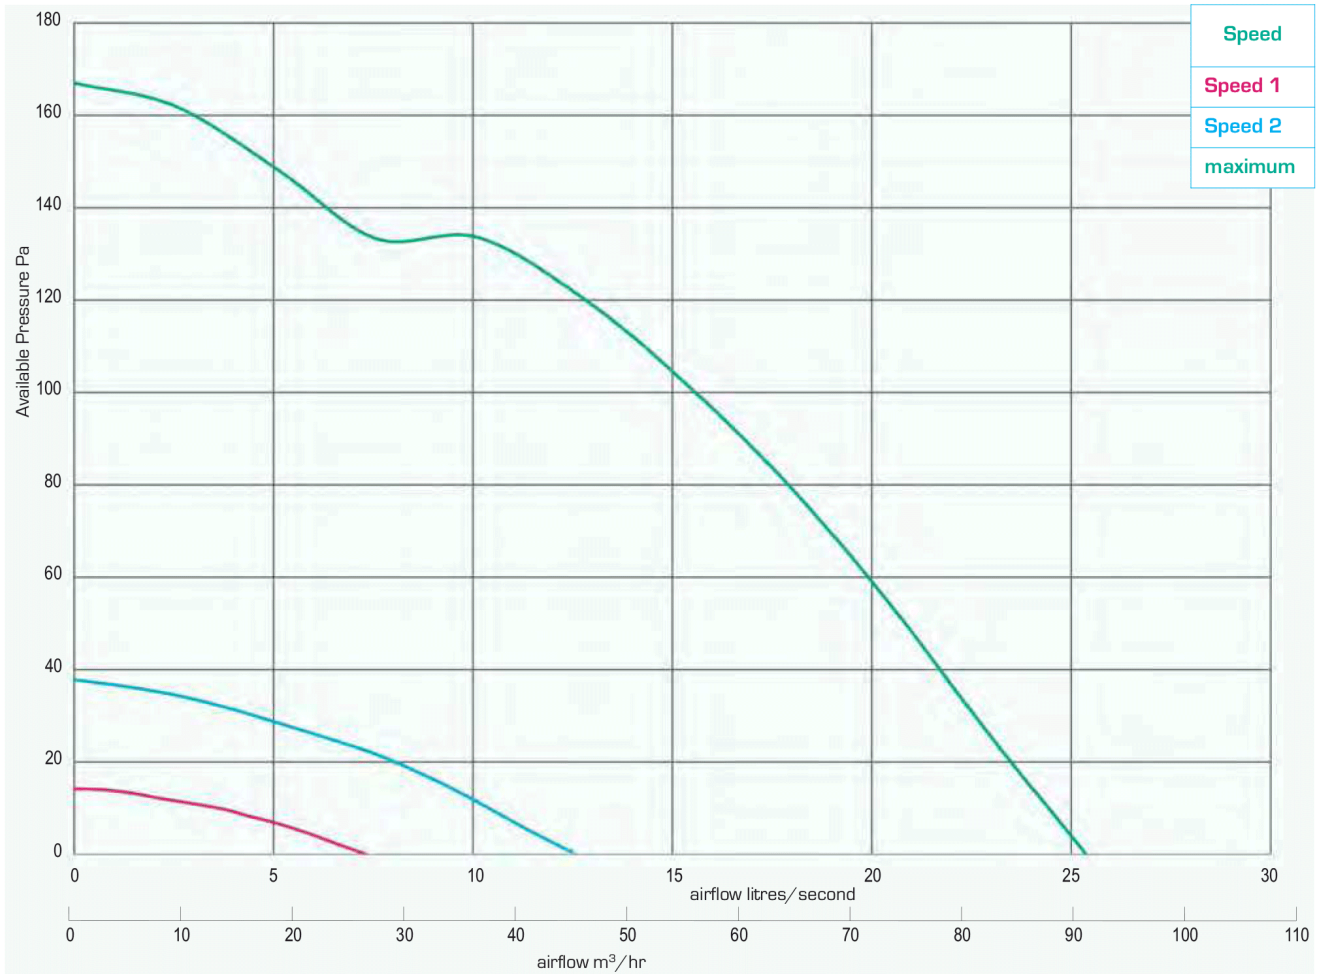

## DIMENSIONS - mm

