


Silent Fan

- From only 12dB(A)
- IPX5 - Zone 1 rated
- Meets current Building Regulations Approved Document F and L
- Extra-long duct run? Models available with speeds adjustable at installation to get the airflow you need
- 8 discreet closed grille models
- Intermittent and continuous running options
- Back draught shutters included
- High efficiency motor
- Up to 5 year warranty
- Suitable for wall, ceiling, window and panel mounting



Silent Fan Axial Bathroom/Toilet Fan

The Silent Fan Range from Vent-Axia not only delivers stylish and silent ventilation without compromise on performance, but also comes with multiple model options providing flexibility when choosing the right fan.

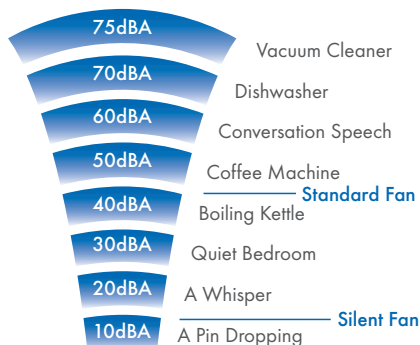

Models

Zone 1 Fixed Speed, Intermittent

Remote or light switch operation. 2 speed options selectable at install. Intermittent operation.

Model **VASF100B** Stock Ref **446658B**

Zone 1 Fixed Speed, Intermittent, Timer

Overrun timer adjustable 5-30 min. 2 speed options selectable at install. Intermittent operation.

Model **VASF100T** Stock Ref **446659B**

Zone 1 Fixed Speed, Intermittent, Humidity Timer

Humidity controlled with fixed 15 min timer overrun. 2 speed options selectable at install. Intermittent operation.

Model **VASF100HT** Stock Ref **477436B**

Zone 1 Variable Speed, Intermittent

Remote or light switch operation. Variable speed options selectable at install. Intermittent operation.

Model **VASF100BV** Stock Ref **479085**

Zone 1 Variable Speed, Intermittent, Timer

Intermittent Operation. Fixed 15 min overrun timer. Variable speed options selectable at install.

Model **VASF100TV** Stock Ref **479086**

Zone 1 Variable Speed, Intermittent, Humidity Timer

Intermittent Operation. Humidity controlled with fixed 15 min timer overrun. Variable speed options selectable at install.

Model **VASF100HTV** Stock Ref **479087**

Zone 1 Variable Speed, Continuous, Timer

Fixed 15 min overrun timer. Continuous running fan with variable speed selectable at install.

Model **VASF100TC** Stock Ref **479088**

Zone 1 Variable Speed, Continuous, Humidity Timer

Humidity controlled with fixed 15 min timer overrun. Continuous running fan with variable speed selectable at install.


Model **VASF100HTC** Stock Ref **479089**

Accessories

Model	Stock Ref
Window Kit	442947
Wall Kit White	254102
Wall Kit Brown	254100
Internal Fit Wall Kit White + Backdraught Shutter	474779

Dimensions (mm)

Closed Grille

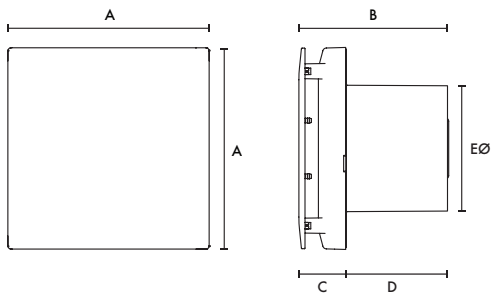


Grille	A	B	C	D	EØ
Closed	160	117	37	80	99

Weight 0.7kg

Performance Guide

Closed Grille

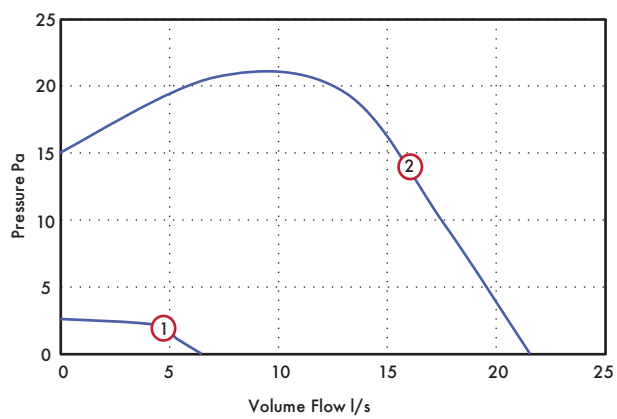

	Model	Speed	l/s	Watts	Warranty (years)
2 Speed	VASF100B/T/ HT	① Low	6	2.7	2
		② High	15	4.8	
Variable Speed	VASF100BV/ TV/HTV	③ Min	6	1.7	5
		④ Max	22	7.5	
Variable Speed	VASF100TC/ HTC	Adjustable Trickle	6 - 15	1.7 - 5	5
		Boost	Adjustable Trickle + 10 (Up to a max of 22 installed)		

All performance testing was done in 'through the wall conditions' - installed with 400mm rigid ducting and an exit terminal.