



**PRODUCT DATA SHEET**


**DUCVKC5631**

**SINGLE AIRBRICK**



**AVAILABLE COLOURS**

- W** RAL9003
- B** RAL8017
- BE** RAL1001
- T** RAL2001
- BL** RAL9011

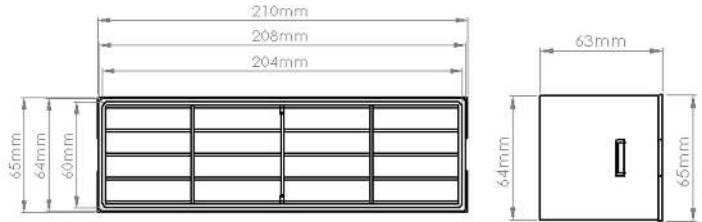

**SPECIFICATION DETAILS**

The DUCVKC5631 204x60mm Rectangular Single Airbrick is manufactured from (white) High Impact Polypropylene and has a minimum free area of 7,680mm<sup>2</sup>.

It has a female adaptor for connection outside of the System 204 duct.

The DUCVKC5631 is fully compliant with SAP Appendix Q Product Characteristics Database recommendations for duct sizes used with both extract and Mechanical Heat Recovery Systems.


DUCVKC5631 is manufactured in compliance with Domestic Plastic Ductwork Specification DW/154 and does meet UL94HB flammability standard.

DUCVKC5631 has been designed for use with Kair System 204.

<b>Manufacturer:</b>	Kair Ventilation
<b>Part Number:</b>	DUCVKC5631
<b>Size:</b>	204mm x 60mm
<b>For use with:</b>	Kair System 204
<b>Box quantity:</b>	20
<b>Individual Weight:</b>	115g
<b>Colour:</b>	White, Brown, Beige & Terracotta

<b>MAX/MIN OPERATING TEMPERATURES</b>	+ 60°C to - 15°C
---------------------------------------	------------------

**PERFORMANCE CURVE**

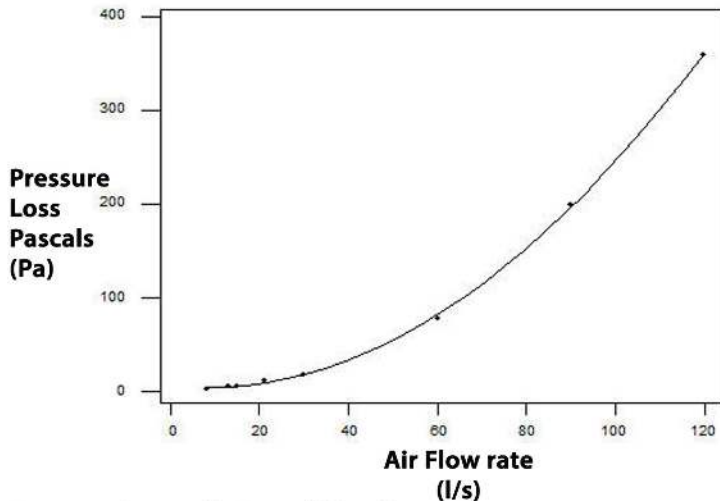

AIRFLOW	RESISTANCE
8 l/s	2.00 pa
13 l/s	5.50 pa
21 l/s	11.00 pa
30 l/s	18.40 pa
60 l/s	71.90 pa
120 l/s	335.00 pa

**Associated Ancillaries**

