





PRODUCT DATA SHEET
DUCMW154FRE
FIRE RATED EXTRACT VALVE

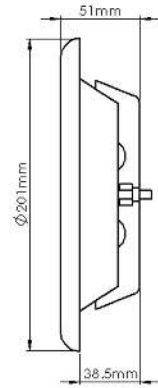

W RAL9010

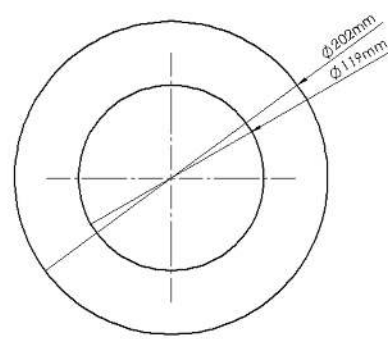

SPECIFICATION DETAILS

The DUCMW154FRE 150mm diameter Round Fire Rated Extract Valve is manufactured from White Epoxy Powder Coated Steel. The valve has a male spigot to fit inside the System 150 duct.

The DUCMW154FRE Extract Air Valve is fully adjustable and has a locking nut to fix the position of the control disc upon commissioning. It is supplied complete with a fixing body with pre-drilled holes for installation.


The DUCMW154FRE incorporates an integral intumescent material and has been fire tested to BS EN 1365-2: 1999 with 60 minute rating for ceilings.

DUCMW154FRE has been designed for use with Kair System 150 Round.

FIRE RATING	60 Minutes
--------------------	------------

Manufacturer:	Kair Ventilation
Part Number:	DUCMW154FRE
Size:	150mm Diameter
For use with:	Kair System 150
Box quantity:	7
Individual Weight:	510g
Colour:	White

PERFORMANCE CURVE

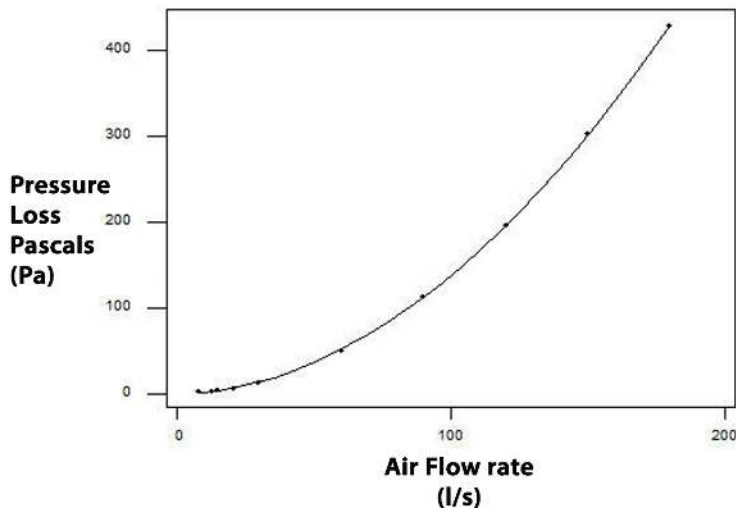

AIRFLOW	RESISTANCE
8 l/s	1.70 pa
13 l/s	2.60 pa
21 l/s	6.00 pa
30 l/s	12.50 pa
60 l/s	49.60 pa
120 l/s	195.20 pa

Associated Ancillaries

