



PRODUCT DATA SHEET

DUCVKC5633G

DOUBLE AIRBRICK ADAPTOR C/W GRILLES

AVAILABLE COLOURS



W RAL9003

B RAL8017

BE RAL1001

T RAL2001

BL RAL9011

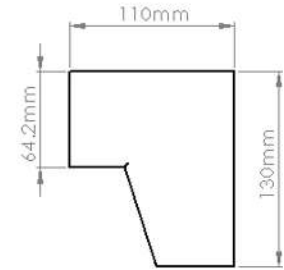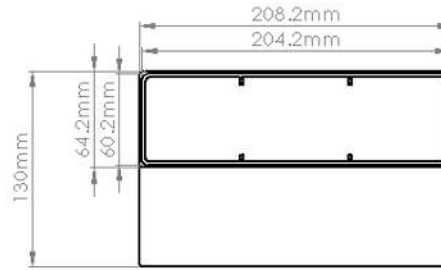

SPECIFICATION DETAILS

The DUCVKC5633G 204x60mm Rectangular Double Airbrick Adaptor with Grilles is manufactured from (white) High Impact Polystyrene and has a minimum free area of 15,360mm². It has a female adaptor for connection outside of the System 204 duct.

The DUCVKC5633G is fully compliant with SAP Appendix Q Product Characteristics Database recommendations for duct sizes used with both extract and Mechanical Heat Recovery Systems.

DUCVKC5633G is manufactured in compliance with Domestic Plastic Ductwork Specification DW/154 and does meet UL94HB flammability standard.


DUCVKC5633G has been designed for use with Kair System 204.

| | |
|---------------------------|----------------------------------|
| Manufacturer: | Kair Ventilation |
| Part Number: | DUCVKC5633G |
| Size: | 204mm x 60mm |
| For use with: | Kair System 204 |
| Box quantity: | 5 |
| Individual Weight: | 258g |
| Colour: | White, Brown, Beige & Terracotta |

MAX/MIN OPERATING TEMPERATURES

+ 60°C to - 15°C

PERFORMANCE CURVE

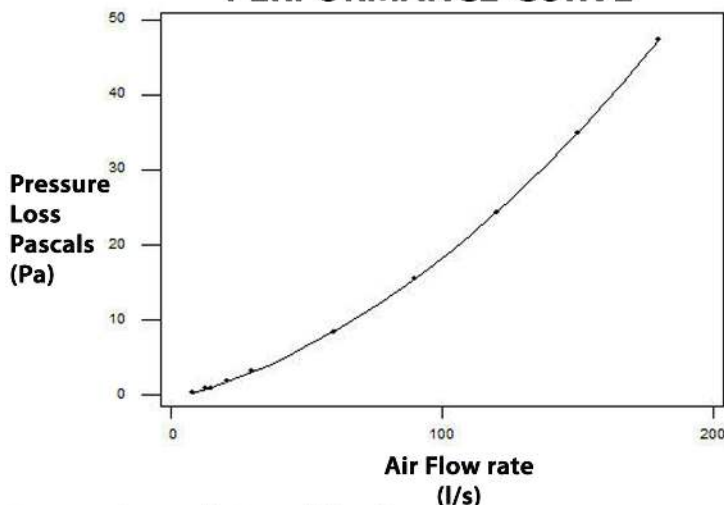

| AIRFLOW | RESISTANCE |
|---------|------------|
| 8 l/s | 0.40 pa |
| 13 l/s | 0.88 pa |
| 21 l/s | 2.00 pa |
| 30 l/s | 3.30 pa |
| 60 l/s | 8.40 pa |
| 120 l/s | 24.40 pa |

Associated Ancillaries

